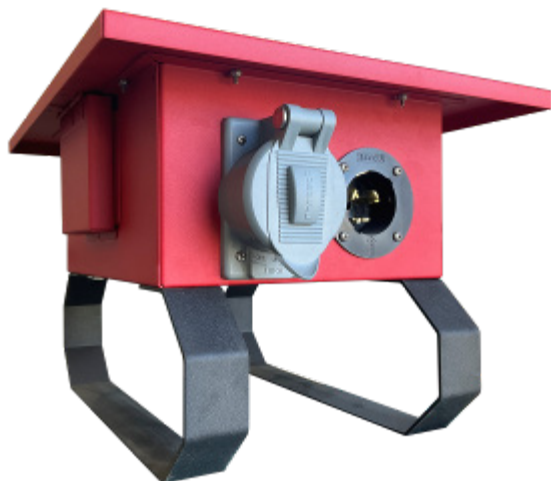




11-302-P
Single Phase | 50 Amps | Water Resistant



11-302-W
Three Phase | 30 Amps

PRODUCT DESCRIPTION

Discover Wurtec's exceptional line of Power Distribution Boxes, the perfect solution for job sites where dependable power is essential.

Our compact and lightweight design ensures effortless portability, making it convenient to carry to any task.

From operating tools and welding to powering False Cars and moving platforms, Wurtec's Power Distribution Boxes deliver the robust power you need to get the job done efficiently and effectively.

KEY FEATURES

- Each box is equipped with Ground Fault Circuit Interrupters (GFCIs), featuring convenient test and reset buttons for added safety and ease of use.
- Connectors and receptacles feature a twist-lock mechanism to ensure secure connections and prevent accidental disconnection.
- Rubberized feet or metal legs to keep connections away from surface moisture.
- Heavy-duty handle for increased portability.

AVAILABLE ACCESSORIES

Need to power something beyond our box's capabilities? Explore our extensive line of power cords and adapters, perfectly compatible with our power distribution boxes.

SPECIFICATIONS_11-302-X

POWER DISTRIBUTION BOXES

11-302-S



The 11-302-S model is a Single Phase, 30 Amp power distribution box.

- Weight: 12.4 lbs
- Length: 9" | Width: 7.5" | Height: 6.5"

Configuration	Connector Type	Use	Plug Type	NEMA Standard	Model Number	Plug Specification
	Twist/Lock Inlet	Connects to Building Power	Male	L14-30P	HBL2715	3 Poles 4 Wire 125/250 Volt 30 Amp
	Twist/Lock Receptacle	Welder Input	Female	L6-30R	HBL2626	2 Poles 3 Wire 250 Volt 30 Amp
	Twist/Lock Connector	Hoist Input	Female	L6-20R	HBL2323	2 Poles 3 Wire 250 Volt 20 Amp
	GFCI Duplex	Power Tool Input	Female	5-20R	GFRST20	125 Volt 20 Amp
	Straight Blade Receptacle	Welder Input	Female	5-20R	HBL5362	125 Volt 20 Amp

ACCESSORIES

Configuration	Description	Part No	Connector Type	Plug Type	NEMA Standard	Model Number	Plug Specification
	250 ft power extension cord connecting building power to the power inlet on the box.	90-10045857	Twist/Lock Inlet	Male & Female	NEMA L14-30P & NEMA L14-30R	HBL2711 & HBL2713	125/250 Volt 30 Amp
	40 in of 10/4 cable that wires into building power (female).	104Adapter	Twist/Lock Inlet	Female	NEMA L14-30R	HBL2713	125/250 Volt 30 Amp

When using the 90-10045857 extension cord, do not exceed 30 Amp rating

SPECIFICATIONS_11-302-X

POWER DISTRIBUTION BOXES

11-302-P





The 11-302-P model is a Single Phase, 50 Amp, Water Resistant power distribution box.

- Weight: 22.2 lbs
- Length: 17" | Width: 14.5" | Height: 11.5"

Configuration	Connector Type	Use	Plug Type	Electrical Standard	Model Number	Plug Specification
	Twist/Lock Inlet	Connects to Building Power	Mixed	California	CS6375	3 Poles 4 Wire 125/250 Volt 50 Amp
	Twist/Lock Receptacle	Welder Input	Mixed	California	CS8269	2 Poles 3 Wire 250 Volt 50 Amp
	Twist/Lock Connector	Hoist Input	Female	NEMA L6-20R	HBL2323	250 Volt 20 Amp
	GFCI Duplex	Power Tool Input	Female	NEMA 5-20R	GFRST20	125 Volt 20 Amp
	Straight Blade Receptacle	Welder Input	Female	NEMA 5-20R	HBL5362	125 Volt 20 Amp

ACCESSORIES

Configuration	Description	Part No	Connector Type	Plug Type	Model Number	Plug Specification
	250 ft power extension cord connecting building power to the power inlet on the box.	90-10045858	Twist/Lock Inlet	Mixed	CS6365C & CS6364C California	125/250 Volt 50 Amp
	40 in of 8/4 cable that wires into building power (female).	84Adapter	Twist/Lock Inlet	Mixed	CS6364C California	125/250 Volt 50 Amp
	Welding adapter with a 2 ft cable.	Welding adapter with a 2 ft cable.	Twist/Lock Inlet	Mixed	California CS8265C & NEMA L6-30R HBL2623	250 Volt 30 Amp

SPECIFICATIONS_11-302-X

POWER DISTRIBUTION BOXES

11-302-W



The 11-302-WS model is a Three Phase with Neutral, 30 Amp power distribution box.

- Weight: 10.4 lbs
- Length: 9" | Width: 7.5" | Height: 6.5"

Configuration	Connector Type	Use	Plug Type	NEMA Standard	Model Number	Plug Specification
	Twist/Lock Inlet	Connects to Building Power	Male	L21-30P	HBL2815	3 Phase 120/208 Volt 30 Amp
	Twist/Lock Receptacle	Welder Input	Female	L6-30R	HBL2626	250 Volt 30 Amp
	Twist/Lock Connector	Hoist Input	Female	L15-20R	HBL2423	250 Volt 20 Amp
	GFCI Duplex	Power Tool Input	Female	5-20R	GFRST20	125 Volt 20 Amp
	Straight Blade Receptacle	Welder Input	Female	5-20R	GFRST20	125 Volt 20 Amp

ACCESSORIES

Configuration	Description	Part No	Connector Type	Plug Type	NEMA Standard	Model Number	Plug Specification
	250 ft power extension cord connecting building power to the power inlet on the box.	90-10045859	Twist/Lock Inlet	Mixed	L21-30P & L21-30R	HBL2811 & HBL2813	120/208 Volt 30 Amp
	40 in of 10/5 cable that wires into building power (female).	105Adapter	Twist/Lock Inlet	Female	L21-30R	HBL2813	120/208 Volt 30 Amp
	Hoist adapter with a 2 ft cable.	90-10045915	Twist/Lock Inlet	Mixed	L15-20P & L15-30R	HBL2421 & HBL2723	250 V 30 Amp & 250 V 20 Amp

When using the 90-10045857 extension cord, do not exceed 30 Amp rating

SPECIFICATIONS_11-302-X

POWER DISTRIBUTION BOXES

11-302-WS



The 11-302-WS model is a Three Phase with Neutral, 30 Amp power distribution box.

- Weight: 10.4 lbs
- Length: 9" | Width: 7.5" | Height: 6.5"

Configuration	Connector Type	Use	Plug Type	NEMA Standard	Model Number	Plug Specification
	Twist/Lock Inlet	Connects to Building Power	Male	L21-30P	HBL2815	3 Phase 120/208 Volt 30 Amp
	Twist/Lock Receptacle	Welder Input	Female	L6-20R	HBL2326	250 Volt 20 Amp
	Twist/Lock Connector	Hoist Input	Female	L15-20R	HBL2423	3 Phase 250 Volt 20 Amp
	GFCI Duplex	Power Tool Input	Female	5-20R	GFRST20	125 Volt 20 Amp
	Straight Blade Receptacle	Welder Input	Female	5-20R	GFRST20	125 Volt 20 Amp

ACCESSORIES

Configuration	Description	Part No	Connector Type	Plug Type	NEMA Standard	Model Number	Plug Specification
	250 ft power extension cord connecting building power to the power inlet on the box.	90-10045859	Twist/Lock Inlet	Mixed	L21-30P & L21-30R	HBL2811 & HBL2813	120/208 Volt 30 Amp
	40 in of 10/5 cable that wires into building power (female).	105Adapter	Twist/Lock Inlet	Female	L21-30R	HBL2813	120/208 Volt 30 Amp
	Hoist adapter with a 2 ft cable.	90-10045915	Twist/Lock Inlet	Mixed	L15-20P & L15-30R	HBL2421 & HBL2723	250 V 30 Amp & 250 V 20 Amp

SPECIFICATIONS_11-302-X