



15-10076308
Universal Hydraulic Jack Stand

PRODUCT DESCRIPTION

Wurtec's Universal Hydraulic Jack Stand provides a safe, reliable means of preventing unintended hydraulic elevator car movement while technicians work in the pit. Designed to attach securely to the elevator car bolster channels, the stand is compatible with Standard T-Rails, Hat Rails, and Omega Rails, making it a versatile solution for a wide range of hydraulic elevator applications.

Combining the best features of Wurtec's proven jack stand designs, this hybrid solution delivers exceptional strength, durability, and dependable performance. With a load capacity of up to 8,000 lb (3,629 kg) per pair, an adjustable height range of 6 to 9 ft (1.8 to 2.7 m), and a fast, straightforward installation process, the Universal Hydraulic Jack Stand helps improve jobsite safety while minimizing setup time.


KEY FEATURES

- Helps prevent unintended hydraulic elevator car movement during pit work
- Compatible with Standard T-Rails, Hat Rails, and Omega Rails
- Supports up to 8,000 lb (3,629 kg) per pair
- Adjustable from 6 to 9 ft (1.8 to 2.7 m)
- Fast, easy installation


SPECIFICATIONS_15-10076308

UNIVERSAL HYDRAULIC JACK STAND



DIMENSIONS

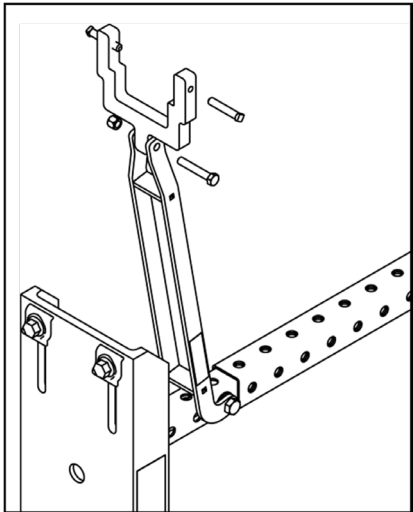

Omega / Hat Rail
Configuration

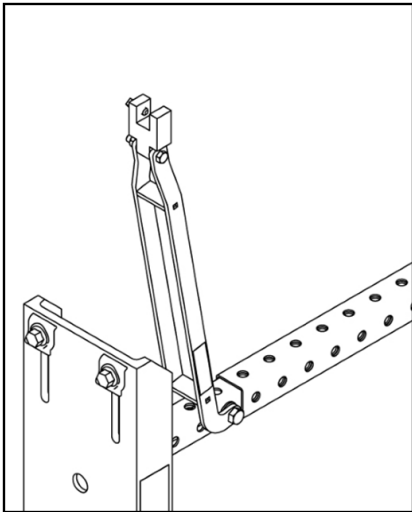

T-Rail Configuration

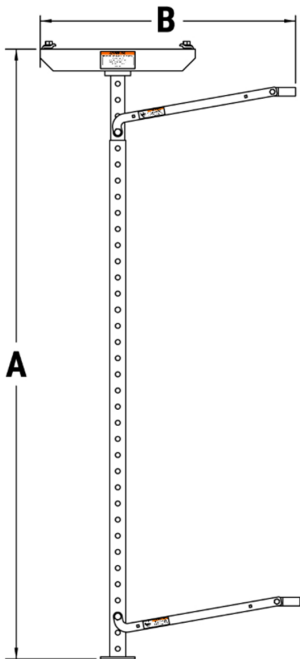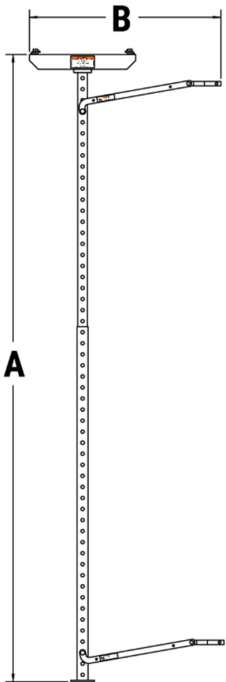

Dimensions		
Rail Type	A	B
Omega / Hat	72" - 108" (6' - 9')	32.46"
T-Rail	72" - 108" (6' - 9')	29.65"

SPECIFICATIONS_XX-XXXXX