




11-330-C
Fast Track III Bracket
(Short Arm Configuration Shown)

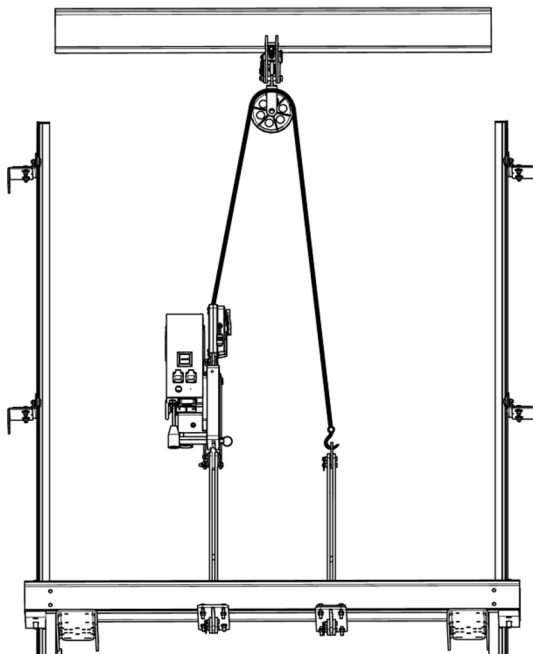

2:1 Installation

PRODUCT DESCRIPTION

The Fast Track III Bracket is a vital solution for elevator installation teams, engineered to securely attach a hoist rope to the car frame (car sling) when using it as a temporary work platform inside the hoistway. Whether your setup requires a one-to-one direct connection or a two-to-one pulley system, this bracket ensures smooth and safe movement of the platform throughout the installation process.


Built to handle loads up to 2500 lbs., the Fast Track III Bracket combines strength, reliability, and compliance with a cost-effective design. Developed as an easier-to-manufacture and more affordable alternative to our original Fast Track Bracket, it delivers the same trusted performance crews have come to expect—now with streamlined production efficiency.

KEY FEATURES

- **Compatible with multiple roping setups.** Works with both 1:1 and 2:1 hoist rope configurations.
- **High load rating.** Supports up to 2500 lbs.
- **Two hoisting bar options.** Short bar (~34 lbs.) and long bar (~45 lbs.) to match installation needs.
- **Heavy-duty construction.** Built for durability in demanding installation environments.
- **Proven functionality.** Maintains the same core function as our original Fast Track Bracket design.

FAST TRACK III BRACKET


11-330-C DIMENSIONS

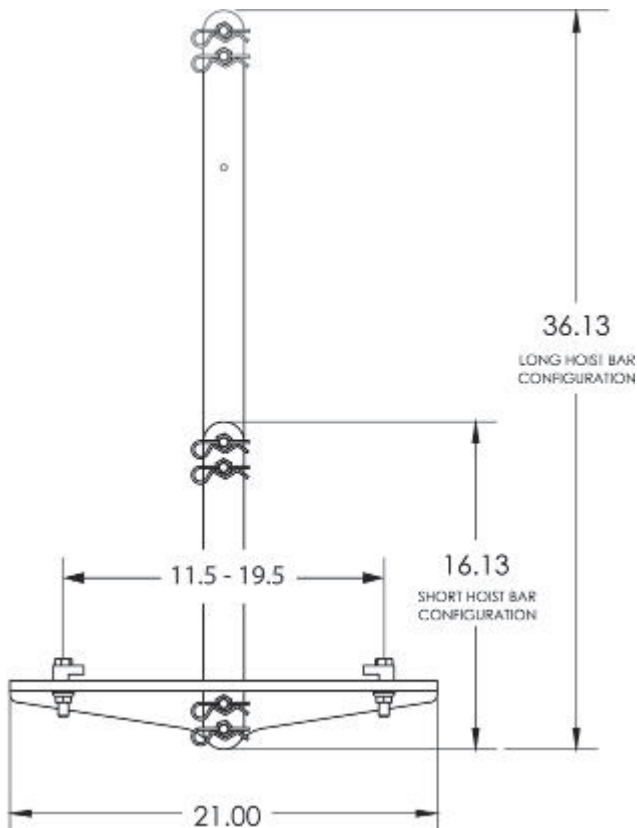

11-330-C Parts List

QTY	Part Number	Description
1	70-10059061	Weldment
2	70-10059062	Fast Track III Hoist Bar
2	70-10059066	Fast Track III Hoist Bar -Short

2: FAST TRACK III ADAPTER KIT

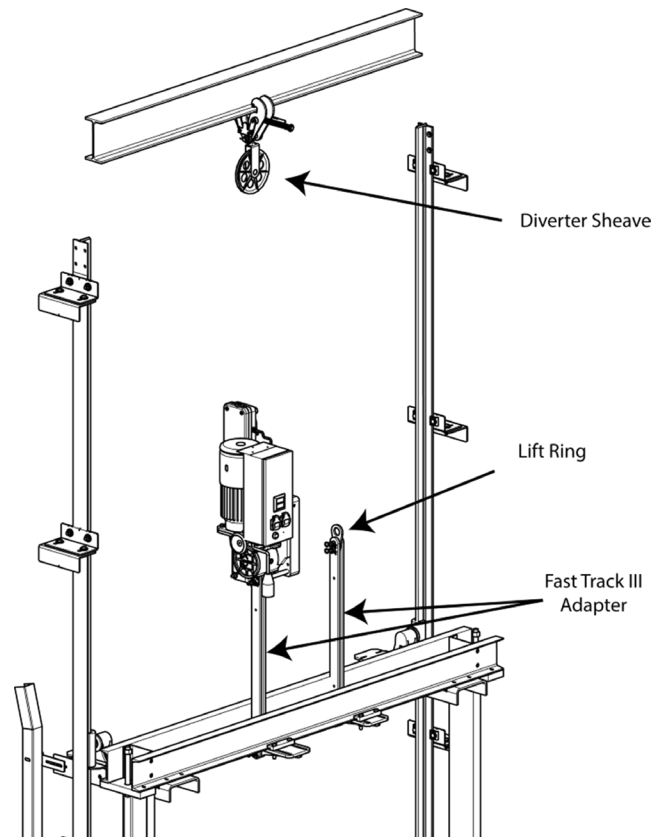

2:1 Method Parts List

QTY	Part Number	Description
2	11-330-C	Fast Track III Adapter
1	11-335-04	Lift Ring
1	925200	Diverter Sheave

SPECIFICATIONS_11-330-C