


## Hat Rail Hoist Bracket

CE

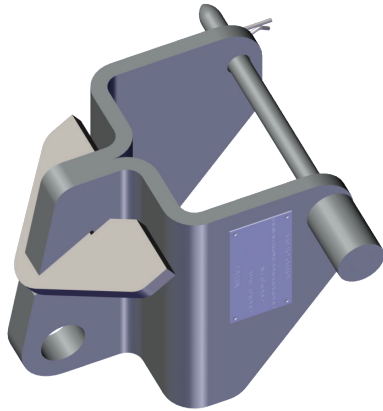


### Instructions

The Wurtec Hat Rail Hoist Bracket allows the user to hoist directly from the roll formed "hat" shaped rails used by Schindler Elevator.

### Steps:

1. Position the hat rail hoist bracket at the desired location, aligning it with the holes provided in the sides of the rail. The hoisting lug should be pointing down.
2. Pin the bracket in place using the special pin provided and lock the pin securely with the cotter pin.
3. The Rail Hoist is now ready to be used. The Hat Rail Hoist Bracket is rated at 5000lbs per bracket or 10000 lbs when used in pairs. This load must be applied in the straight vertical direction only. The user is responsible for choosing a location on the stack of rails that is properly supported and attached to the building structure.

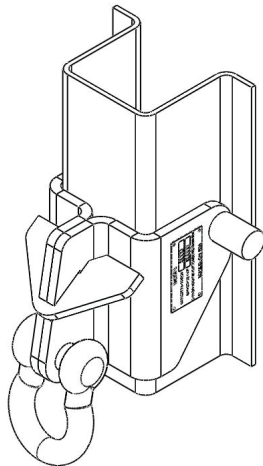

Part No. 11-195