


T-RAIL HOIST RIG

Part No. 11-293 & 10-10001435

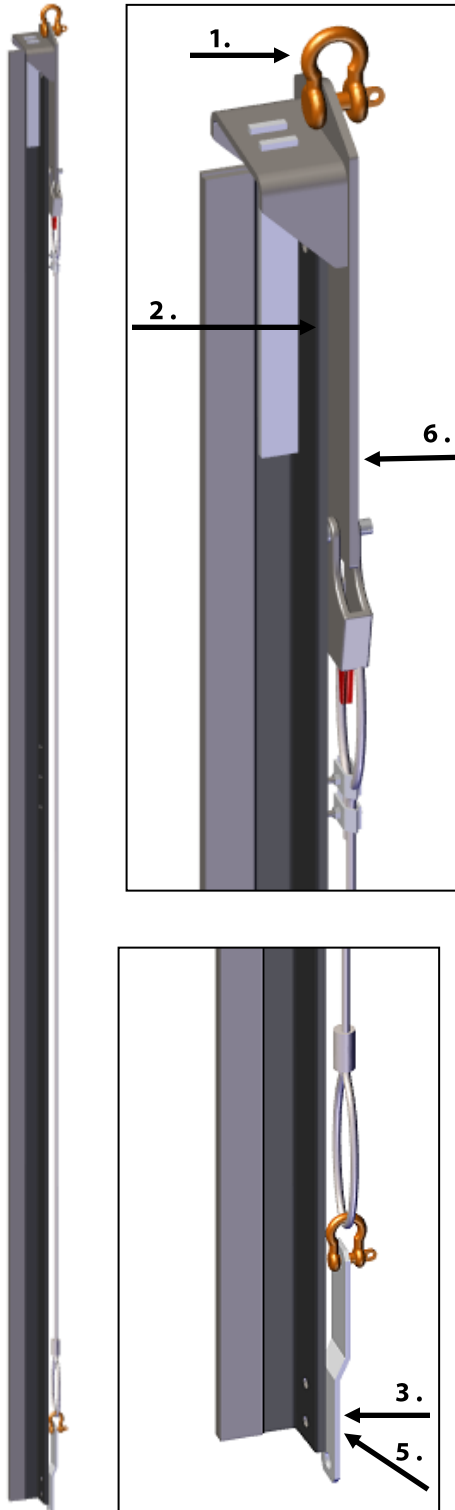

Product Description

The #11-293 T-Rail Hoist Rig will hoist rails sizes up to 18.5 lbs/ft without the fish plates being attached at the top of the rail. The #10-10001435 will hoist jumbo rails up to 30 lbs/ft without the fish plates being attached at the top of the rail.

1. Safely attach the top of the upper hoist rig to your hoist cable using the provided clevis.
2. Place the upper hoist rig over the top of the rail, centering the rail between the retainer bars.
3. Securely attach the cable link to a mounting hole in the bottom of the rail. **The sling may have to be adjusted based on rail length.** Make sure that as you lift the rail, the rail stays trapped by the retainer bars of the upper hoist rig.
4. Hoist rail into place, securing the bottom of the hoisted rail to the top of the preceding rail.
5. Remove the cable link from the rail mounting hole and lift the hoist rig off the rail.
6. Lower the hoist rig down to the next rail and repeat.

CAUTION

Swivel must be used to prevent spinning of rail.

Part No.	Rail Size	ISO Designations
11-293	5/8" & 3/4"	T89, T90, T114, T127-1, T127, T140-1
10-10001435	1 1/8" & 1 1/4"	T140-2, T140-3