




DROP LEG JACK STAND

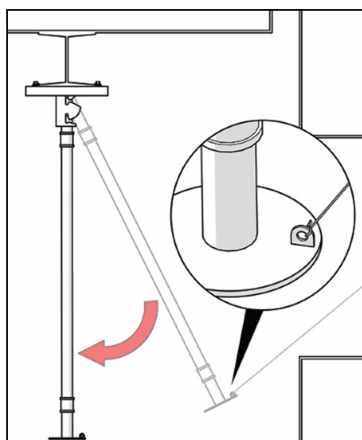

11-531
In Context

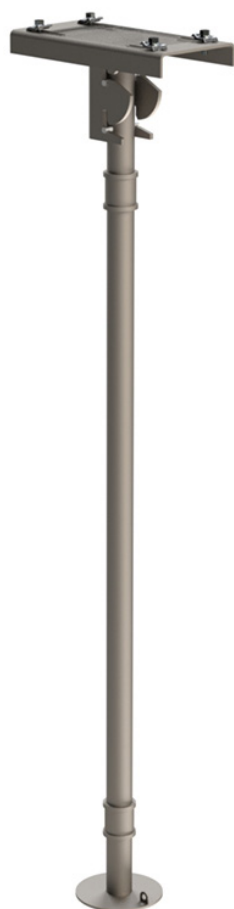


11-531



Receiver



Upper Adapter



Base & Lower Adapter

PRODUCT DESCRIPTION

Wurtec's Drop Leg Jack Stand provides temporary support for hydraulic elevator cars weighing up to 6,000 lb (2,722 kg), allowing technicians to safely access the pit during installation, maintenance, and repair. The stand can be installed from the landing and lowered radially into position, minimizing the need to enter the pit before the support is securely in place.

For applications requiring additional support, the 11-535 Hydraulic Jack Stands can be used in conjunction with the Drop Leg Jack Stand.

KEY FEATURES

- Supports hydraulic elevator cars up to 6,000 lb (2,722 kg)
- Installed from the landing for added safety and convenience
- Radially lowers into position for temporary car support
- Provides safe pit access for maintenance and service work
- Compatible with 11-535 Hydraulic Jack
- Stands for additional safety measures
- Designed for use with 2 in. (51 mm) Schedule 40 pipe (not included)

***NOTE:** Drop Leg Jack Stands are sold individually, but must be used in pairs.

Part No.	Column Length (ft / m)	Maximum Load (lbs / kg)
11-531	6 ft / 1.83 m	9,500 lbs / 4,309 kg
11-531	7 ft / 2.13 m	6,975 lbs / 3,164 kg
11-531	8 ft / 2.44 m	5,325 lbs / 2,415 kg
11-531	9 ft / 2.74 m	4,220 lbs / 1,914 kg
11-531	10 ft / 3 m	3,420 lbs / 1,551 kg

SPECIFICATIONS_11-531