


ALUMINUM ROPE SHORTENING CLAMP



Part No. 60-10059515
6-Rope Clamp for 5/16" Ropes



Part No. 60-10069053
8-Rope Clamp for 5/16" Ropes

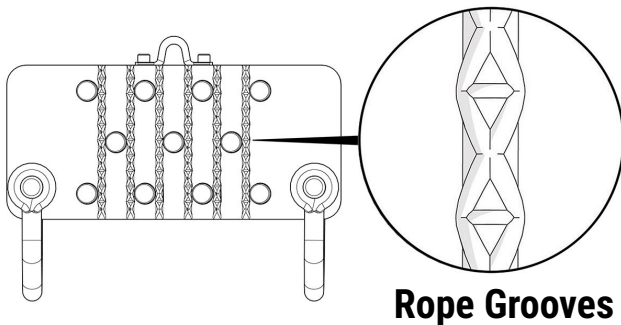

Rope Grooves

Product Description

Wurtec's **aluminum rope shortening clamp** allows the user to lift the elevator car by clamping onto the hoist ropes directly above the hitch plate.

Once the shortening clamp is in place, a pair of hoists can be attached between it and the crosshead.

Slack can then be created in the hoist ropes, allowing for easy shortening of the rope at the hitch plate.

These aluminum rope shortening clamps are a lightweight alternative to cast iron clamps, delivering an up to 55% weight reduction.

⚠ WARNING

To prevent the cable from slipping, be sure the shortening clamp is positioned with grooves on each rope and torqued to the proper specification.

Part No.	No. of Ropes	Rope Size (in)	Rope Size (mm)	Capacity	Torque	Weight
60-10059515	6	5/16	7-8	8000 • 3628	100 • 136	32.37 • 14.68
60-10059554	6	3/8	9-10	8000 • 3628	100 • 136	32.27 • 14.64
60-10059605	6	7/16	11	8000 • 3628	100 • 136	32.18 • 14.60
60-10057059	6	1/2 - 9/16	12-14	8000 • 3628	100 • 136	32.05 • 14.54
60-10059610	6	5/8 - 11/16	15-17	8000 • 3628	100 • 136	34.89 • 15.83
60-10059623	6	3/4	18-20	12000 • 5443	100 • 136	34.46 • 15.63
60-10059626	6	7/8	21-22	12000 • 5443	100 • 136	33.95 • 15.40
60-10069053	8	5/16	7-8	13000 • 5896	100 • 136	30.98 • 14.05
60-10066453	8	3/8	9-10	13000 • 5896	100 • 136	31.47 • 14.27
60-10069056	8	7/16	11	13000 • 5896	100 • 136	31.97 • 14.5
60-10069059	8	1/2-9/16	12-14	13000 • 5896	100 • 136	32.44 • 14.71
60-10069062	8	5/8-11/16	15-17	13000 • 5896	100 • 136	33.29 • 15.10
60-10069065	8	3/4	18-20	16000 • 7257	100 • 136	34.71 • 15.74
60-10069071	8	7/8	21-22	16000 • 7257	100 • 136	34.73 • 15.75