
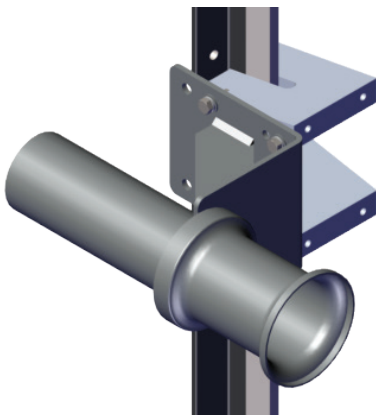
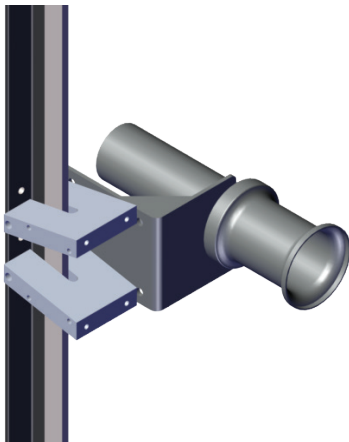



Rail Brackets: Pair

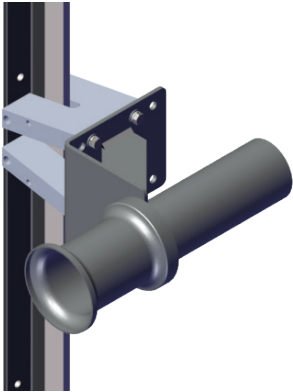

Description

These aluminum blocks will allow multiple positioning of the capstan hoist/bracket to standard size elevator guide rails. The deep cut slot permits fastening to the throat of the guide rail, without scoring the finisher surface. The high bracket can then be attached to either side of the front of the aluminum blocks, for maximum flexibility of hoist locations.

Intended Use

This bracket is intended only for mounting the C308-1170 or C308-1172 Capstan Hoists to the designated rail sizes via the C417-6015 Mounting Bracket. **NOT** intended for any other uses.



WARNING

It is recommended to replace set screws after every use or when the cup point has been worn down. Failure to comply may result in serious injury or death.

Maximum Capacity 1,000 lbs/454 kg

Part No.	Rail Blade Width (in.)	Rail Size (lbs.)	Rail Size (ISO)	Weight (lbs.)
C417-6016	5/8 and 3/4	8-18	T89-T140-1	8.5
C417-6017	1 1/8 and 1/4	22-30	T140-2, T140-3	13
C417-6016B	Hardware Kit Replacement			
25747	Set Screws Replacement			