


Crosshead Clevis

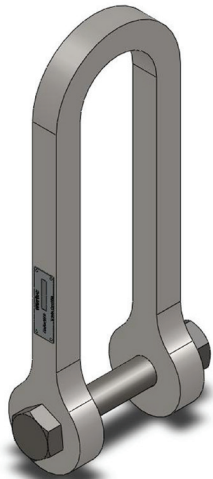

Instructions

The Wurtec Crosshead Clevis eliminates the need for wire rope slings. It will save time and improve safety.

Steps:

1. Remove bolt from Clevis.
2. Place Clevis around the crosshead channel with the bolt side below the crosshead.
3. Install bolt.
4. Attach the hook from chain fall or any other hoisting means to the top of the Clevis.

Note: Rated at 5 Tons, Fits up to a 12" Ship Channel



Part No. 11-270