

KEY BRACKET ASSEMBLY

Part No. 20-10090822

INSTALLATION INSTRUCTIONS

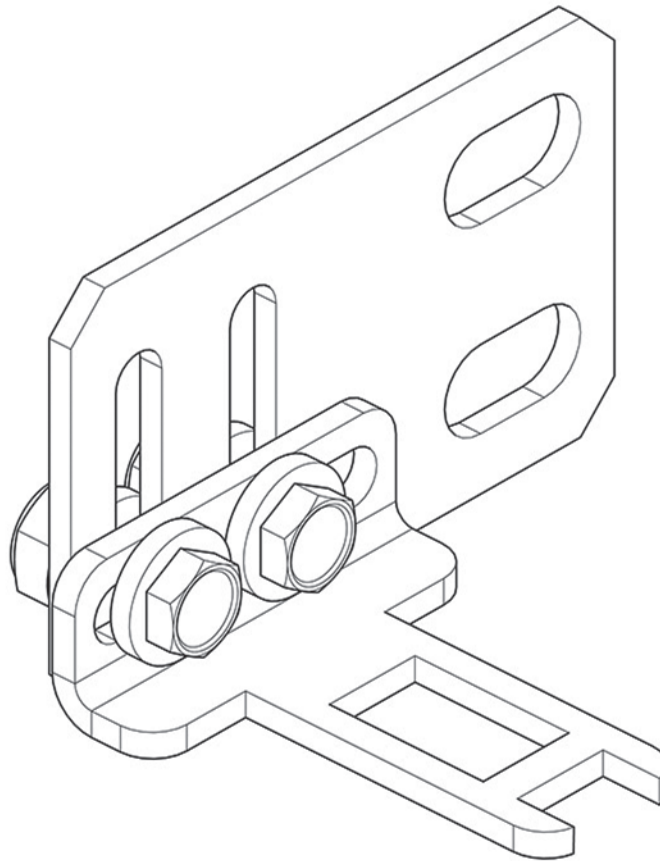


TABLE OF CONTENTS

Product Information & Safety Warnings	2
Installation	3

PRODUCT INFORMATION & SAFETY WARNINGS

PRODUCT WARRANTY & INFORMATION




Scan the QR code to view detailed warranty information at wurtec.com. For questions or product support, contact Wurtec Customer Service at 1-800-837-1066. If a Declaration of Conformity is available for this product, it can be downloaded from its product page on wurtec.com.

EXCLUSION OF LIABILITY


This equipment should only be installed and serviced by trained personnel. This manual is intended as a guide only and is not a substitute for formal training; it may not cover every scenario or condition of use. Wurtec reserves the right to change product design and specifications without notice. Always use standard PPE, including safety glasses, gloves, boots, a hard hat, and fall protection.

INSTALLATION

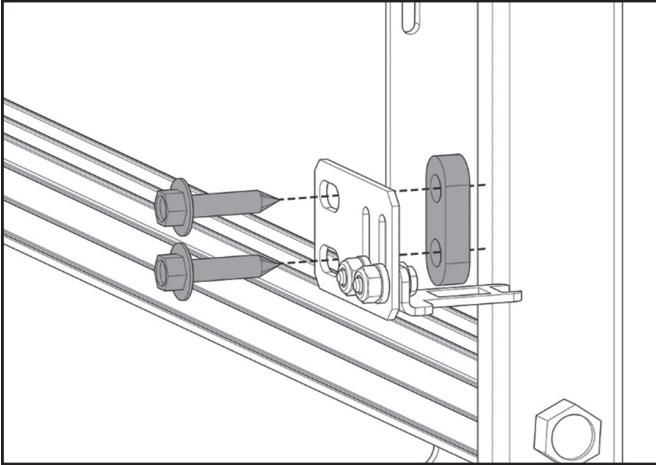


Step 1: Remove Old Key Bracket

- Detach the existing riveted key bracket from the ladder
- NOTE: Keep the spacer and self drilling screws for later use

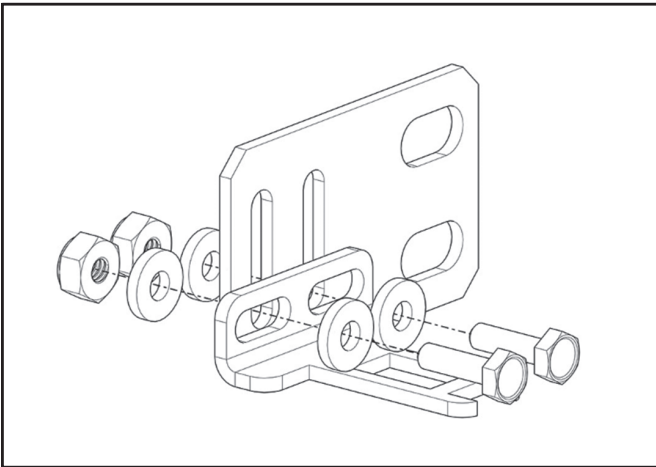

Step 2: Assemble the New Key and Bracket


- Align the new key with the vertical slots on the key bracket
- Place a washer on each screw
- Insert the hex head screws through the key and bracket from the side with the key prongs
- Add a washer and nylock nut to the back side and tighten down the connections
- The connections should be snug enough that the key will hold its position, but loose enough to adjust and line up with the switch during final installation

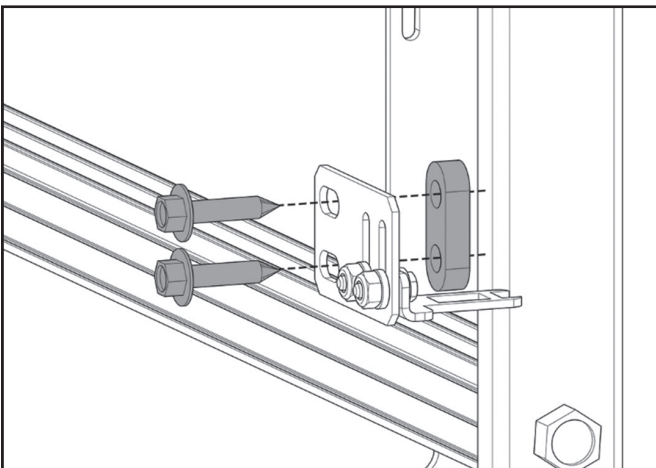

Step 3: Mount to Ladder Rail

- Place the spacer between the key bracket and the ladder rail
- Mount the key bracket assembly to the ladder rail using the two self drilling screws from step 1
- The screws must pass through the key bracket, spacer, and ladder rail

INSTALLATION

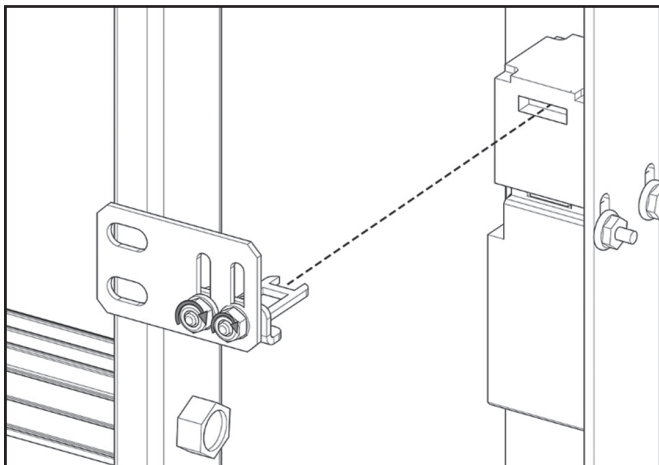

Step 4: Final Adjustment

- Slowly retract the ladder back into the normal operating position until the key is near the electrical switch.
- Adjust the key into position and carefully finish closing the ladder so that the key engages the electrical switch.
- The key bracket may also need to be adjusted side to side to be able to allow the key to fully engage the electrical switch properly.
- Once completely closed and alignment is verified, tighten down all loose hardware.
- Extend and retract the ladder to verify smooth engagement of the key with the electrical switch.